



HERITAGE **TWO-HANDLE WALL-MOUNT SINK FAUCET** WITH BRASS SPOUT



MODEL NUMBER:

- 7295.152 Wall-Mount Sink Faucet 5-5/8" cast swivel spout. Brass Lever Handles. Soap dish.
- **7298.152 Wall-Mount Sink Faucet** 8" tubular swivel spout. Brass Lever Handles. Less soap dish.
- 7292.152 Wall-Mount Sink Faucet 12" tubular swivel spout. Brass Lever Handles. Less soap dish.

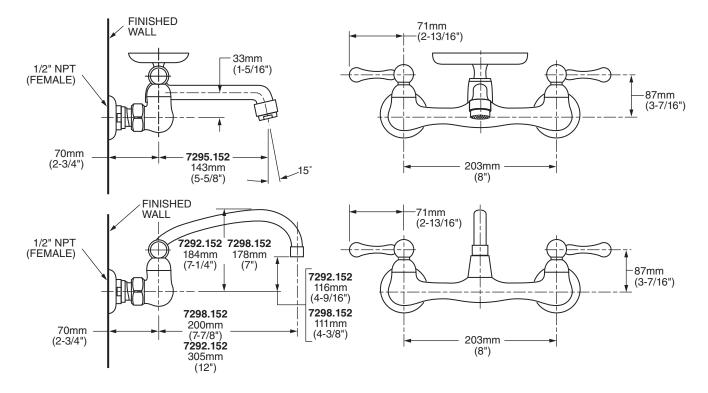

GENERAL DESCRIPTION:

Durable brass construction throughout. Amarilis 1/4 turn washerless ceramic disc valve cartridges. One-half inch NPT female inlets with brass coupling nuts. 1.5gpm/5.7L/min. maximum flow rate.

PRODUCT FEATURES:

Ceramic Disc Valve Cartridges: Assures a lifetime of drip-free performance.

Solid Brass Construction: Durable - Excellent in high use applications. Ideal for prolonged contact with water. Low Lead: Meets NSF Standard 61/Section 9 & Prop 65 lead requirements.

SUGGESTED SPECIFICATION:

Wall-mount sink faucet shall be cast brass construction with all brass coupling nuts. Shall also feature 1/4 turn washerless ceramic disc valve cartridges. 1.5gpm/5.7L/min. maximum flow rate. Fitting shall be American Standard Model #


American Standard

HERITAGE TWO-HANDLE WALL-MOUNT SINK FAUCET WITH BRASS SPOUT

CODES AND STANDARDS

These products meet or exceed the following codes and standards:

ANSI A117.1 ASME A112.18.1 **CSA B 125** NSF 61/Section 9



		Finish
Product		Polished Chrome
Number	Description	002
7295.152	Wall-mount sink faucet. 5-5/8" cast swivel spout. Brass Lever Handles. Soap dish.	
7298.152	Wall-mount sink faucet. 8" tubular swivel spout. Brass Lever Handles. Less soap dish.	
7292.152	Wall-mount sink faucet. 12" tubular swivel spout. Brass Lever Handles. Less soap dish.	



MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ANSI A117.1 REQUIREMENTS FOR ACCESSIBLE AND USABLE BUILDING FACILITIES-CHECK LOCAL CODES