



# CLEAN® ACTIVATE™ TOUCHLESS FLUSH RIGHT HEIGHT® ELONGATED COMPLETE TOILET

VITREOUS CHINA

## CLEAN® ACTIVATE™ TOUCHLESS FLUSH RIGHT HEIGHT® ELONGATED COMPLETE TOILET

### 701AA109

- Vitreous china
- Germ-free no-touch flush
- Up to 2-year battery power included
- Powered by 4AA batteries (included)
- Power off mode omits accidental flushes while cleaning
- Consistent, reliable flush every time
- Manual flush button conveniently located on sensor if needed
- Meets definition for HET (High Efficiency Toilet)
- High efficiency (4.8 Lpf/1.28 gpf)
- Meets EPA WaterSense® criteria (Pending)
- 305mm (12") rough-in
- 16-1/2" rim height for accessible applications
- Toilet stays cleaner longer with EverClean surface. EverClean® surface inhibits the growth of stain- and odor-causing bacteria, mold, and mildew on the surface
- Elongated siphon action jetted bowl with smooth-sided, bowl base that makes cleaning easy
- Generous 9" x 8" water surface area
- PowerWash® rim rinses the bowl with pressurized water with every flush
- Great flush performance with an oversized 3" flush valve
- **Easy Installation.** Everything needed for toilet installation is included and can be hand tightened
- 2 1/8" fully glazed trapway
- Includes top mounting, plastic seat and cover with EverClean finish that helps keep the seat cleaner longer
- 2 color-matched bolt hole covers
- 100% factory flush tested
- Lifetime warranty on chinaware, 5 year warranty on all mechanical parts, 1 year on the electronics and 1 year warranty on seat

### Nominal Dimensions:

768 x 399 x 781mm  
(30-1/4" x 15-3/4" x 30-3/4")

Fixture, toilet seat, wax ring, and bowl bolts only.  
Supply line is not included.

### Compliance Certifications -

#### Meets or Exceeds the Following Specifications:

- ASME A112.19.2-2008/CSA B45.1-08 for Vitreous China Fixtures
- US EPA WaterSense® Specification for HET's



MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES  
AND ICC ANSI A117.1 REQUIREMENTS FOR ACCESSIBLE AND  
USABLE BUILDING FACILITIES-CHECK LOCAL CODES.



SEE REVERSE FOR ROUGHING-IN DIMENSIONS

### To Be Specified:

- ☐ Color: ☐ White
- ☐ Supply with stop:


EVERCLEAN®  
Surface





 **BARRIER FREE**

# CLEAN® ACTIVATE™ TOUCHLESS FLUSH RIGHT HEIGHT® ELONGATED COMPLETE TOILET VITREOUS CHINA

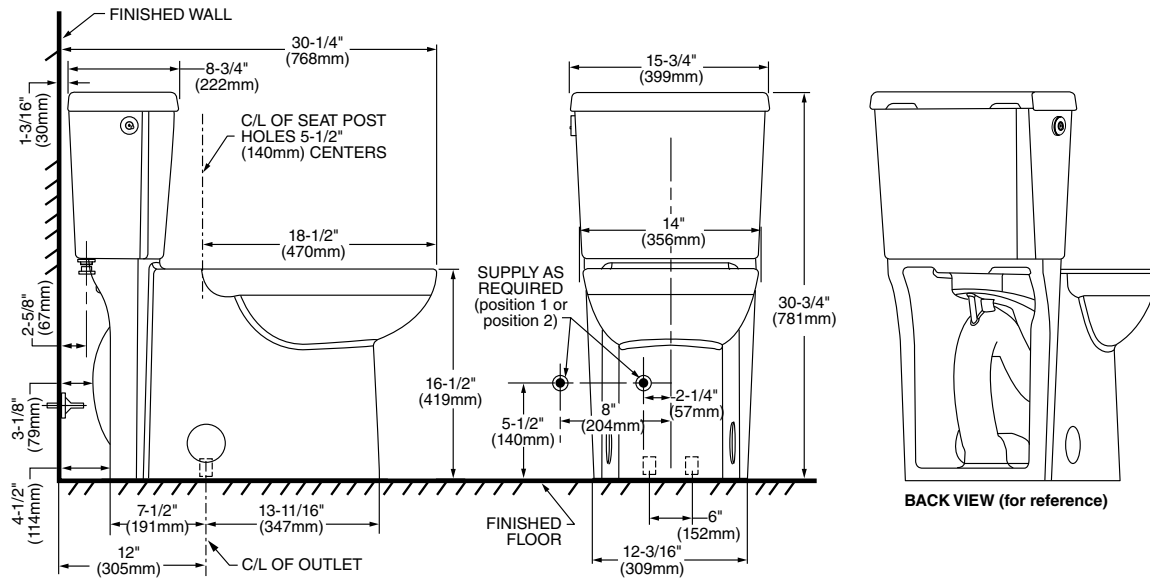

**IMPORTANT:** Water supply on the wall is required at 2-1/4" or 8" from centerline of the toilet (see rough-in). First suggested position is hidden behind the toilet. The geometry of the toilet gives space for this installation. The second suggested position is next to the toilet. Between these two positions, the space for the supply between wall and toilet is limited to 4-1/2". In this case, check your supply and hose dimensions.

#### NOTES:

THIS COMBINATION IS DESIGNED TO ROUGH-IN AT A MINIMUM DIMENSION OF 305MM (12") FROM FINISHED WALL TO C/L OF OUTLET.

\* DIMENSIONS SHOWN FOR LOCATION OF SUPPLY ARE SUGGESTED.

SUPPLY NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY.

**IMPORTANT:** Dimensions of fixtures are nominal and may vary within the range of tolerance established by ANSI Standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.



**MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES  
AND ICC ANSI A117.1 REQUIREMENTS FOR ACCESSIBLE AND  
USABLE BUILDING FACILITIES-CHECK LOCAL CODES.**