


COPELAND® PRESSURE BALANCE BATH/SHOWER FITTING



T005.502 Bath/Shower Trim Shown

GENERAL DESCRIPTION:

SHOWERHEAD

Single function showerhead at maximum 2.5 gpm/9.5 L/min. flow rate.

WALL TUB SPOUT

Metal slip-on diverter spout.

WALL VALVE TRIM


Available with metal lever handle. Metal wall escutcheon.

MODEL NUMBER:

TRIM KITS:

- ☐ T005.502 Copeland BATH/SHOWER Trim Kit Metal Lever Handle. LESS Valve Body.
- T005.501 Copeland SHOWER ONLY Trim Kit Metal Lever Handle. LESS Valve Body.
- ☐ T005.500 Copeland VALVE ONLY Trim Kit Metal Lever Handle. LESS Valve Body.

For use with R120 Series Pressure Balance Valves. See reverse side for available Rough Valves.

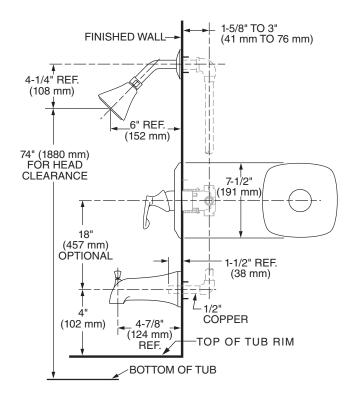

SUGGESTED SPECIFICATION:

Bath/shower fitting shall feature a cast brass valve body. Fitting shall be: American Standard - Trim Kit Model # T005.50_.__ and Valve Body Model # R12_.




COPELAND® PRESSURE BALANCE BATH/SHOWER FITTING

CODES AND STANDARDS

These products meet or exceed the following codes and standards:

ANSI A 117.1 ASSE 1016 ASME A112.18.1 CSA B 125.1



| | | * TRIM & ROUGH MUST BE ORDERED SEPARATELY. | Finish Options | | |
|-------|----------|--|--------------------|-------------------------|------------------------|
| * SL | Product | | Polished Chrome | Oil Rubbed Bronze | PVD Satin Nickel |
| IN KI | Number | Description | 002 | 224 | 295 |
| | T005.502 | Bath/Shower Trim Kit. Metal Lever Handle. LESS Valve Body. | | | |
| F | T005.501 | Shower Only Trim Kit. Metal Lever Handle. LESS Valve Body. | | | |
| | T005.500 | Valve Only Trim Kit. Metal Lever Handle. LESS Valve Body. | | | |

| | Product Number | Description |
|----------------|-------------------|---|
| | R121 | Rough Valve Body less trim. Universal inlets/outlets. |
| ES | R121SS | Rough Valve Body less trim. Universal inlets/outlets with Screwdriver Stops. |
| ₫ | R120 | Rough Valve Body less trim. Direct Sweat inlets/outlets. |
| ROUGH VALVE BO | R120SS | Rough Valve Body less trim. Direct Sweat inlets/outlets with Screwdriver Stops. |
| | R125 | Rough Valve Body less trim. Female Thread inlets/outlets. |
| | R125SS | Rough Valve Body less trim. Female Thread inlets/outletswith Screwdriver Stops. |
| | R127 | Rough Valve Body less trim. PEX inlets/universal outlets for Crimp Ring PEX system (ASTM F1807). |
| | R127SS | Rough Valve Body less trim. PEX inlets/universal outlets for Crimp Ring PEX system (ASTM F1807) with Screwdriver Stops. |
| | R128 | Rough Valve Body less trim. PEX inlets/universal outlets for Cold Expansion PEX system (ASTM F1960). |
| | R128SS | Rough Valve Body less trim. PEX inlets/universal outlets for Cold Expansion PEX system (ASTM F1960) with Screwdriver Stops. |
| | R129 | Rough Valve Body less trim. CPVC inlets/universal outlets. |
| | R129SS | Rough Valve Body less trim. CPVC inlets/universal outlets with Screwdriver Stops. |

Meets the American Disabilities Act Guidelines and **ANSI A117.1**Requirements for the physically challenged.