


SEVA[™] PRESSURE BALANCE BATH/SHOWER FITTING

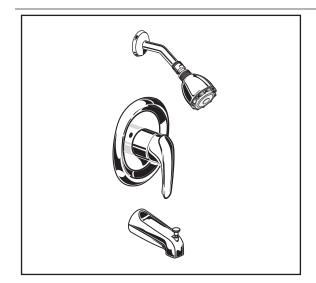

MODEL NUMBER:

TRIM KITS:

- T480.502 Seva BATH/SHOWER Trim Kit Metal Lever Handle. LESS Valve Body.
- T480.501 Seva SHOWER ONLY Trim Kit Metal Lever Handle. LESS Valve Body.
- T480.500 Seva VALVE ONLY Trim Kit Metal Lever Handle. LESS Valve Body.

5-1/8

REF.

(130 mm)

BOTTOM OF TUB


4" REF.

(102 mm)

1/2" COPPER

TOP OF TUB RIM

For use with R120 Series Pressure Balance Valves. See reverse side for available Rough Valves.

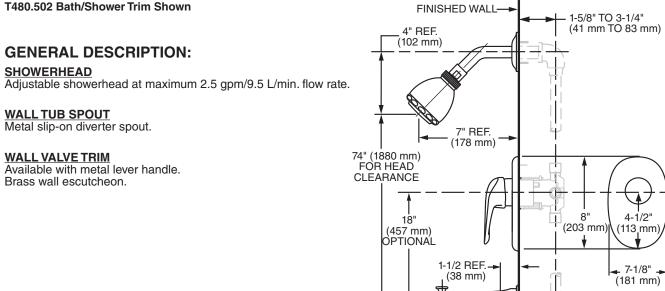

SUGGESTED SPECIFICATION:

Bath/shower fitting shall feature adjustable showerhead with Max. 2.5 gpm/9.5 L/min. flow rate. Fitting shall be: American Standard - Trim Kit Model # T480.50_.___. and Valve Body Model # R12_.




SEVA[™] PRESSURE BALANCE BATH/SHOWER FITTING

CODES AND STANDARDS

These products meet or exceed the following codes and standards:

ANSI A 117.1 ASSE 1016 ASME A112.18.1 CSA B 125.1

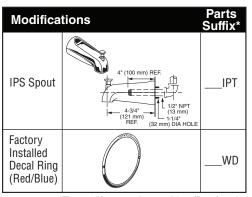

*To modify a product, add suffix after the 4th digit (ex. T064**ITP**502.002)

			FLO	W RATE	*	=	Spout Shower
щ	⁸ Г	-					
GALLONS PER MINUTE	6						
NS PE	4						
GALLO	2			_	_		
	οL						.
	5	20	40	60	80	100	
		1	NLET	PRESS	URE ((PSI)	
*Flow rates shown are for mixed hot and cold.							

		* TRIM & ROUGH MUST BE ORDERED SEPARATELY.		Finish Options	
TS *	Product		Polished Chrome	PVD Satin Nickel	
Y	Number	Description	002	295	
RIM	T480.502	Bath/Shower Trim Kit. Metal Lever Handle. LESS Valve Body.			
F	T480.501	Shower Only Trim Kit. Metal Lever Handle. LESS Valve Body.			
	T480.500	Valve Only Trim Kit. Metal Lever Handle. LESS Valve Body.			

	Product Number	Description
	R121	Rough Valve Body less trim. Universal inlets/outlets.
S Ш	R121SS	Rough Valve Body less trim. Universal inlets/outlets with Screwdriver Stops.
	R120	Rough Valve Body less trim. Direct Sweat inlets/outlets.
BO	R120SS	Rough Valve Body less trim. Direct Sweat inlets/outlets with Screwdriver Stops.
Ē	R125	Rough Valve Body less trim. Female Thread inlets/outlets.
	R125SS	Rough Valve Body less trim. Female Thread inlets/outletswith Screwdriver Stops.
2	R127	Rough Valve Body less trim. PEX inlets/universal outlets for Crimp Ring PEX system (ASTM F1807).
OUGH	R127SS	Rough Valve Body less trim. PEX inlets/universal outlets for Crimp Ring PEX system (ASTM F1807) with Screwdriver Stops.
õ	R128	Rough Valve Body less trim. PEX inlets/universal outlets for Cold Expansion PEX system (ASTM F1960).
	R128SS	Rough Valve Body less trim. PEX inlets/universal outlets for Cold Expansion PEX system (ASTM F1960) with Screwdriver Stops.
	R129	Rough Valve Body less trim. CPVC inlets/universal outlets.
	R129SS	Rough Valve Body less trim. CPVC inlets/universal outlets with Screwdriver Stops.

Meets the American Disabilities Act Guidelines and ANSI A117.1 £

Requirements for the physically challenged.