
TIMES SQUARE®

PRESSURE BALANCE BATH/SHOWER FITTING

WITH FloWise® SHOWERHEAD



T184.502 Bath/Shower Trim Shown

GENERAL DESCRIPTION:

SHOWERHEAD

Brass 8" Square Rain Showerhead at maximum 2.5 gpm/9.5 L/min. flow rate. 12" Brass right angleshower arm.

WALL TUB SPOUT

Metal slip-on diverter spout.

WALL VALVE TRIM


Available with metal lever handle. Metal wall escutcheon.

MODEL NUMBER:

TRIM KITS:

- ☐ T184.502 Times Square BATH/SHOWER Trim Kit Metal lever handle. FloWise showerhead. LESS valve body.
- ☐ T184.501 Times Square SHOWER ONLY Trim Kit Metal lever handle. FloWise showerhead. LESS valve body.
- ☐ T184.500 Times Square VALVE ONLY Trim Kit Metal lever handle. LESS valve body.

For use with R110 Series Pressure Balance Valves. See reverse side for available Rough Valves.

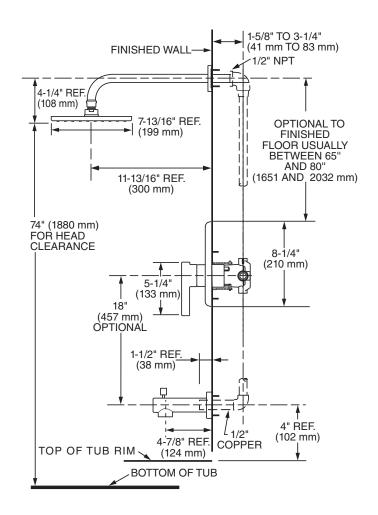

SUGGESTED SPECIFICATION

Bath/shower fitting shall feature brass square rain showerhead with Max. 2.5 gpm/9.5 L/min. flow rate. Fitting shall be: American Standard - Trim Kit Model # T184.50_.___ and Valve Body Model # R11_.

© 2017 AS America. Inc. Revised 5/17




TIMES SQUARE® PRESSURE BALANCE BATH/SHOWER FITTING

CODES AND STANDARDS

These products meet or exceed the following codes and standards:

ANSI A117.1 / ASSE 1016 ASME A112.18.1 / CSA B125.1

MODIFICA	MODIFICATIONS	
IPS Spout	4° REF. (100 mm) 11/2° NEF. (124 mm) DA HOLE	IPT
Factory Installed Decal Ring (Red/Blue)		WD



*To modify a product, add suffix after the 4th digit (ex. T064<u>ITP</u>502.002)

		* TRIM & ROUGH MUST BE ORDERED SEPARATELY.		Finish Options	
*SLI	Product		Polished Chrome	PVD Brushed Nickel	
Y	Number	Description ADA	002	295	
	T184.502	Bath/Shower Trim Kit. Metal lever handle. FloWise® showerhead. LESS valve body.			
	T184.501	Shower Only Trim Kit. Metal lever handle. FloWise showerhead. LESS valve body.			
	T184.500	Valve Trim Only. Metal lever handle. LESS valve body.			

	Product Number	Description
	R111	Rough Valve Body less trim. Universal inlets/outlets.
	R111SS	Rough Valve Body less trim. Universal inlets/outlets with Screwdriver Stops.
ES	R110	Rough Valve Body less trim. Direct sweat inlets/outlets.
ODI	R110SS	Rough Valve Body less trim. Direct sweat inlets/outlets with Screwdriver Stops.
m	R115	Rough Valve Body less trim. Female Thread inlets/outlets.
/ALVE	R115SS	Rough Valve Body less trim. Female Thread inlets/outlets with Screwdriver Stops.
\ \	R117	Rough Valve Body less trim. PEX inlets/universal outlets for Crimp Ring PEX system (ASTM F1807).
UGH	R117SS	Rough Valve Body less trim. PEX inlets/universal outlets for Crimp Ring PEX system (ASTM F1807) with Screwdriver Stops.
RO	R118	Rough Valve Body less trim. PEX inlets/universal outlets for Cold Expansion PEX system (ASTM F1960).
	R118SS	Rough Valve Body less trim. PEX inlets/universal outlets for Cold Expansion PEX system (ASTM F1960) with Screwdriver Stops.
	R119	Rough Valve Body less trim. CPVC inlets/universal outlets.
	R119SS	Rough Valve Body less trim. CPVC inlets/universal outlets with Screwdriver Stops.

Meets the American Disabilities Act Guidelines and ANSI A117.1 Requirements for the physically challenged.

© 2017 AS America, Inc.

Revised 5/17