


**GENERAL DESCRIPTION:**

Commercial shower system trim kit includes metal valve trim, wall supply (with 1/2" NPT female inlet and 1/2" NPSM male outlet), a 59" (1500 mm) metal shower hose, vacuum breaker, a 3-function hand shower with non-positive shut-off and a 36" slide-grab bar. One-piece double ceramic pressure balance cartridge maintains a constant output temperature in response to changes in relative hot and cold supply pressure. Integral check valves prevent cross flow. Adjustable hot limit safety stop. Back-to-back capable. Durable valve trim with metal handle and escutcheon. 36" long combination slide bar / grab bar. 1-1/2" diameter stainless steel bar that meets ANSI standard 250 lb pull test. Chrome-plated hand shower holder with ADA compliant lever handle. 2.5 gpm/9.5 L/min.

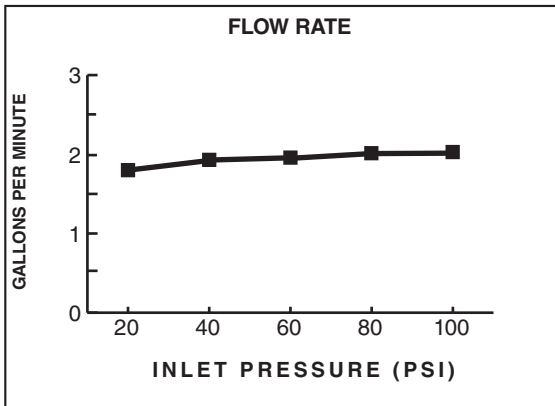

**MODEL NUMBER:**

**TU662SG.221 Commercial Shower System Kit**

Includes:

- Reliant3 Valve Only Trim TU385500WD \*\*  
- Includes Pressure Balance Cartridge
- 3-Function Hand Shower with non-positive shut-off 1660.767
- In-Line Vacuum Breaker 1660.400
- 59" Metal Hose 8888.035
- Wall Supply 8888.037
- 36" Slide-Grab Bar 1662.236

**\*\* Flash rough-in valve must be purchased separately**

**PRESSURE BALANCE CARTRIDGE:**

**One-Piece Cartridge:** Simplifies installation and maintenance.

**Double Ceramic Pressure Balance Cartridge:** Combination of ceramic disc mixing valve and a ceramic balancing spool in a one-piece cartridge.

**Ceramic Disc Mixing Valve:** Assures a lifetime of drip-free performance and smooth handle operation.

**Ceramic Balancing Spool:** Maintains a constant output temperature in response to changes in relative hot and cold supply pressure. Ceramic material is unaffected by mineral deposits and harsh water conditions.

**Integrated Check Valves:** Engineered to eliminate cross flow.

**Adjustable Hot Limit Safety Stop:** Limits the amount of hot water allowed to mix with cold. Reduces the risk of accidental scalding.

**Comfort Zone:** Offers a wider range to fine tune the desired temperature.

**Back-to-Back Capability:** Hot and cold can be reversed quickly and easily.

**Trim Kit:** Metal escutcheon with metal lever. Red / blue indicator ring.

**PERSONAL SHOWER:**

**ADA-Compliant:** Non-positive shut-off button on handle reduces flow to a trickle.

**SLIDE-GRAB BAR:**

**Stronger Than Standard Slide Bars:** 1-1/2" diameter stainless steel bar meets ANSI standard 250 lb. pull test. Chrome-plated hand shower holder with ADA compliant lever handle.

**SUGGESTED SPECIFICATION**

Commercial shower system trim kit shall feature metal valve trim, wall supply (with 1/2" NPT female inlet and 1/2" NPSM male outlet), 59" metal hose, vacuum breaker, 2.5 gpm/9.5 L/min. 3-function hand shower with non-positive shut-off and a 36" slide-grab bar. Shall also feature one-piece double ceramic pressure balance cartridge. Fitting shall be American Standard Model # TU662SG.221.002.

**CODES AND STANDARDS**

These products meet or exceed the following codes and standards:

- ASSE 1016
- ASME A112.18.1016
- CSA B125.16
- ASME A112.18.1
- CSA B125.1

Product Number	Description	Finish
		Polished Chrome
		002

TU662SG.221	Commercial Shower System Trim Kit. Contains double ceramic pressure balance cartridge, valve trim kit, 3-function hand shower with non-positive shut-off, metal hose, vacuum breaker, wall supply and 36" slide-grab bar. 2.5 gpm/9.5 L/min. <b>** Flash rough-in valve must be purchased separately</b>
-------------	---

