

**AXIS™ 32" SQUARE SHOWER
BASE AND DRAIN**

❑ **3232S-ST3 SQUARE SHOWER BASE**

Product Features:

- Durable acrylic construction with fiberglass reinforcement for lasting beauty
- Accessible, low, single threshold design for easy entry and exit
- Center drain location
- Shower drain with stainless steel drain cover included
- Integral water retention flanges to prevent behind-the-wall leaks and makes tiling easier
- Limited Lifetime Warranty



Nominal Dimensions:

32-3/4" x 32-3/4" x 3-1/4"
(832 x 832 x 82mm)

Compliance Certifications -

Meets or Exceeds the Following Specifications:


- CSA B45.5 / IAPMO Z124

SEE REVERSE SIDE FOR ROUGHING-IN
DIMENSIONS AND PRODUCT SPECIFICATIONS

NOTES:

REFER TO INSTALLATION INSTRUCTIONS SUPPLIED WITH SHOWER
BASE FOR ADDITIONAL INFORMATION.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the
range of tolerances established by ANSI Standard CSA B45.5 / IAPMO Z124.
These measurements are subject to change or cancellation. No responsibil-
ity is assumed for use of superseded or voided pages.

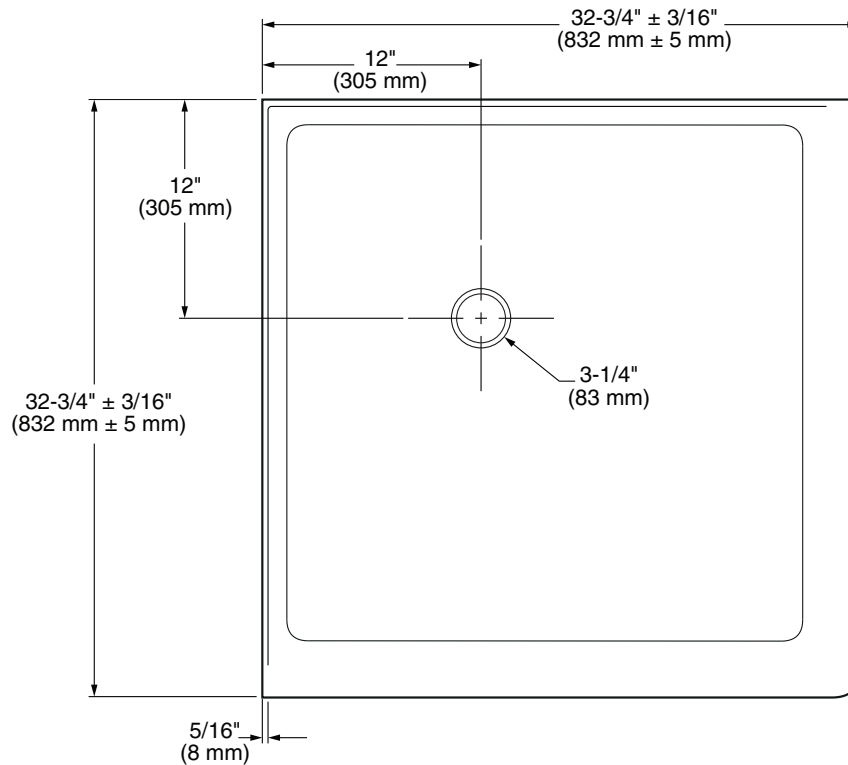

GENERAL SPECIFICATIONS FOR 3232S-ST3 SHOWER BASE

INSTALLED SIZE _____ 32-3/4 x 32-3/4 x 3-1/4 IN.
(832mm x 832mm x 82mm)

WEIGHT _____ 30 LBS. (14 Kg.)

WEIGHT w/WATER _____ 80 LBS. (36 Kg.)

SHOWER WELL AT SUMP _____ 26-5/8 x 26-5/8 IN. (676mm x 676mm)

SHOWER WELL AT RIM _____ 28-1/4 x 28-1/4 IN. (718mm x 718mm)

FLOOR LOADING _____ 10 LBS./SQ. FT. (52 Kgs/Sq. m.)
(PROJECTED AREA)