


MODEL # 26512000

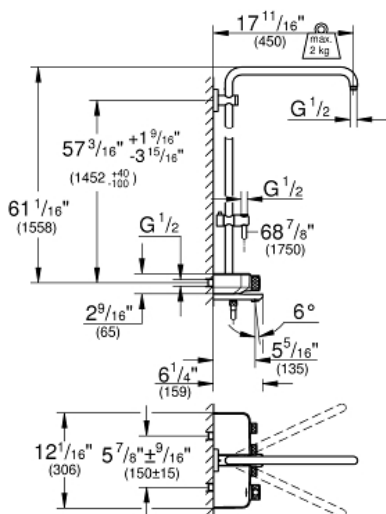

### Shower System with Bath Thermostat for Wall Mount

- Consisting of:
- Horizontal 17 3/4" (450 mm) shower arm\*
- Upper bracket adjustable for minimal adaption to existing drilling holes
- Exposed SmartControl bath thermostat
- Allows change between:
- Head shower and hand shower (to be ordered separately)\*\*
- With ball joint
- Rotation angle  $\pm 15^\circ$
- Tub Spout
- Adjustable height bar with gliding element
- Rotaflex metal shower hose 69" (1750mm)
- **GROHE StarLight** chrome finish
- **GROHE CoolTouch** No risk of scalding
- **GROHE TurboStat** Compact cartridge with wax thermoelement
- **GROHE EcoJoy** technology for less water and perfect flow
- GROHE SafeStop at 100°F (38°C)
- GROHE SafeStop Plus optional temperature limiter at 110°F (43°C) included
- SmartControl push for ON-OFF, turn for volume adjustment from EcoJoy to Full Flow
- Integrated GROHE EasyReach shower tray
- Inner WaterGuide for a longer life
- Twistfree to prevent hose from twisting
- Minimum flow rate 1.8 gpm (7 l/min)
- Min. recommended pressure: 15 psi (1.0 bar)
- \*Shower head weight of up to 4.4 lbs (2 kg) acceptable

- ASME A112.18.1/CSA B125.1

❑ 26512000 StarLight Chrome