


RAPID SL

MODEL # 38587000

Pure Freude
an Wasser

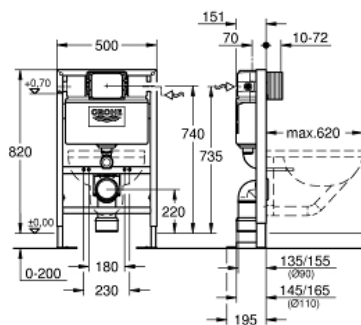

Product Description:

RAPID SL

Standard Specification:

with flushing cistern (1.6 - 2.4 gpm)

for free-standing installation, for on-the-wall installations or studded walls

- Powder coated self-supporting steel frame
- For dry-cover (completely pre-assembled)
- With fixed connections lockable
- TÜV approved
- Mounting material
- WC mounting screws (2x)
- Mounting kit for ceramic
- Distance of mounting screws (7" - 9")
- outlet bend Ø 90 mm
- Depth adjustable
- Reducer Ø 90/110 mm
- Inlet and outlet connecting set
- Pneumatic discharge valve offering: 3 modes of operation: dual flush or start/stop or single flush
- Front or top actuation
- Water supply from left, right, or back
- Low noise (group I acc. to/German Noise Specification)
- Insulated against condensation
- ½" water supply connection, includes integrated angle valve with push-fit flexible hose union
- inspection shaft with protecting block

Color:

□ 38587000

