


GENERAL DESCRIPTION:

Below deck thermostatic water mixing valve to be used with sensor faucets. ASSE 1070 certified. Adjustable temperature by using a 4mm Hex wrench, coin or flat screwdriver. To decrease temperature, rotate counter-clockwise. To increase temperature, rotate clockwise.


PRODUCT FEATURES:

- Anti-scald protection
- Built-in check valves prevent cross-flow
- 3/8" Stainless steel compression flex hoses, 20" length included
- Lead Free: Valve contains $\leq 0.1\%$ to 0.25% total lead content by weighted average.
- ASSE 1070 certified down to 0.35 gpm

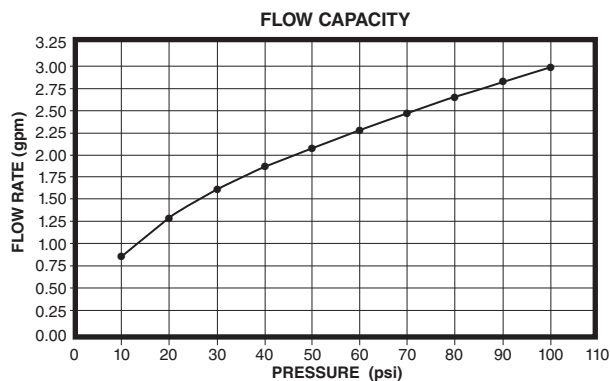

MODEL NUMBER:

- ☐ **1070_TMV** Recommended to be used with Sensor Faucets.

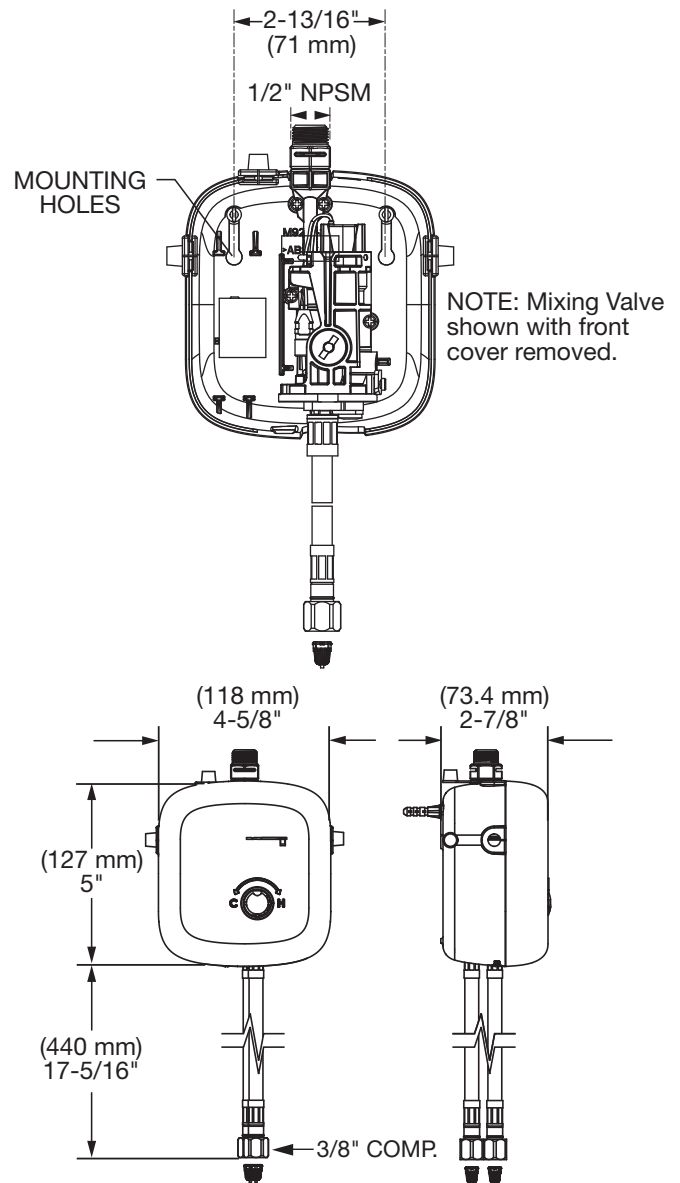

RECOMMENDED SPECIFICATION

The Mixing Valve shall be of thermostatic type with built-in check valves to prevent cross-flow. ASSE 1070 certified. Includes 20" long S.S. flex hoses with 3/8" compression fittings. Fitting shall be American Standard Model # 1070_TMV.