

CHAMPION® 4 HET RIGHT HEIGHT® **ELONGATED COMPLETE TOILET**

CHAMPION® 4 HET RIGHT HEIGHT® **ELONGATED COMPLETE TOILET**

□ 2793528NT

- Vitreous china
- EverClean® Surface included
- Meets definition for HET (High Efficiency Toilet)
- High efficiency (1.28 gpf/4.8 Lpf)
 Meets EPA WaterSense® Criteria
- Features Champion® Flushing System
- Includes tank liner to reduce condensation
- 4" non-adjustable piston action Accelerator™ flush valve
- 16-1/2" rim height for accessible applications
- 2-3/8" fully-glazed trapway
- Speed Connect® tank/bowl coupling system
- Chrome finish trip lever is supplied
- Sweeping pier on bowl
- 100% factory flush tested
- 2 bolt caps
- Color-matched plastic toilet seat
- Wax ring gasket with closet bolts
- 10 year warranty on all mechanical parts and 1 year warranty on seat
- Easy Installation. Everything needed for toilet installation is included and can be hand tightened

Nominal Dimensions:


30-1/4" x 17-7/8" x 31-3/16" (768 x 454 x 792mm)

Compliance Certifications -Meets or Exceeds the Following Specifications:

- ASME A112.19.2/CSA B45.1 for Vitreous China Fixtures
- US EPA WaterSense® Specification for HETs

To Be Specified: □ Color: □ White Supply with stop:



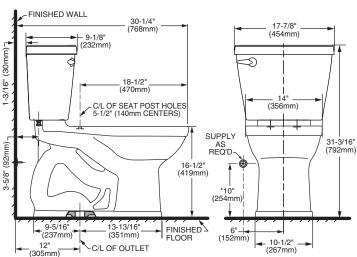

NOTES:

THIS TOILET IS DESIGNED TO ROUGH-IN AT A MINIMUM DIMENSION OF 305MM (12") FROM FINISHED WALL TO C/L OF OUTLET. SUPPLY NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED

* DIMENSION SHOWN FOR LOCATION OF SUPPLY IS SUGGESTED.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ASME A112.19.2/CSA B45.1 These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.







AND ICC ANSI A117.1 REQUIREMENTS FOR ACCESSIBLE AND USABLE BUILDING FACILITIES-CHECK LOCAL CODES.

MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES