

**CLEAN® CONCEALED TRAPWAY DUAL FLUSH
CHAIR HEIGHT ELONGATED TOILET WITH SEAT**

721AA.203S

- CHAIR HEIGHT Elongated Complete Toilet
- **Easy Installation.** Everything needed for toilet installation is included and can be hand tightened
- 12" (305mm) rough-in
- Siphon action jetted bowl with smooth-sided, concealed trapway
- High efficiency, low consumption Full Flush 1.28gpf/4.8Lpf Conserving Flush 1.0gpf/3.8Lpf, utilizes 21% less water
- **Meets EPA WaterSense® Criteria**
- Toilet stays cleaner longer with EverClean® surface. EverClean surface inhibits the growth of stain and odor-causing bacteria, mold, and mildew on the surface
- PowerWash® rim rinses the bowl with pressurized water with every flush
- 16-1/2" (419mm) rim height
- Fully-glazed 2-1/8" trapway
- Oversized 3" flush valve
- Generous 9" x 8" water surface area
- Includes slow close seat with easy lift-off feature for simple removal and reattachment for cleaning
- Chrome-plated top mounted push button actuator
- 2 color matched bolt hole covers
- Limited Lifetime Warranty

Nominal Dimensions:

30-1/4" x 15-3/4" x 30-3/4"
(769 x 400 x 780mm)
Supply by others



SEE REVERSE FOR ROUGHING-IN DIMENSIONS

Compliance Certifications -


Meets or Exceeds the Following Specifications:

- ASME A112.19.2-2008/CSA B45.1-08 for Vitreous China Fixtures

To Be Specified:

- ☐ Color: ☐ White ☐ Supply with stop:



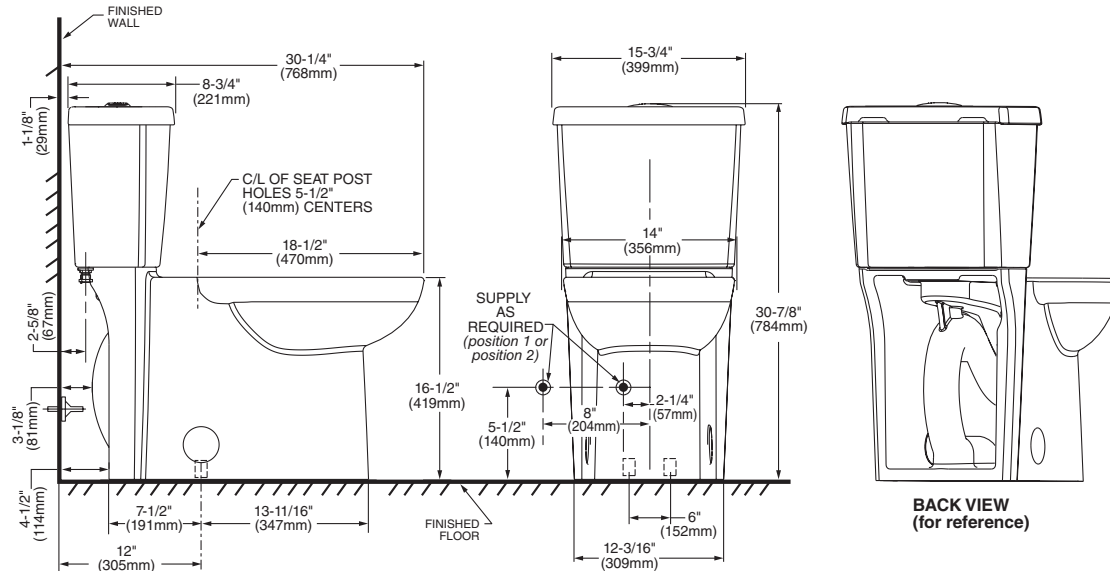

IMPORTANT: Water supply on the wall is required at 2-1/4" or 8" from centerline of the toilet (see rough-in). First suggested position is hidden behind the toilet. The geometry of the toilet gives space for this installation. The second suggested position is next to the toilet. Between these two positions, the space for the supply between wall and toilet is limited to 4-1/2". In this case, check your supply and hose dimensions.

NOTES:

THIS TOILET IS DESIGNED TO ROUGH-IN AT A MINIMUM DIMENSION OF 305MM (12") FROM FINISHED WALL TO C/L OF OUTLET. SUPPLY NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY.
* DIMENSION SHOWN FOR LOCATION OF SUPPLY IS SUGGESTED.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.