



# BREATHING WALL-ECOCARAT

Rooted in traditional Japanese mud-wall construction, ECOCARAT is a sublime collection of interior wall tiles that combine natural materials and colors with exquisite patterns to impart a sense of unparalleled beauty and relaxation. Defined by design and technology excellence, ECOCARAT features moisture-regulating and odor reducing properties to help enhance indoor comfort.

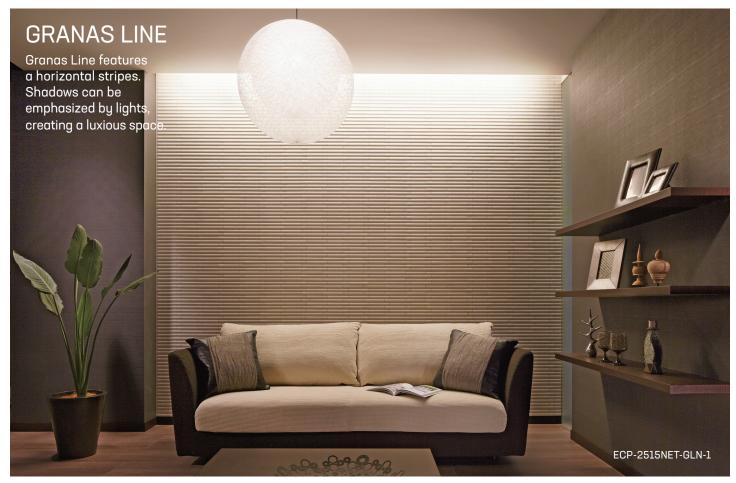

	APPLICATIONS (Interior Dry Wall ONLY)									
LIVING WA		BEDROOM WALL	ENTRANCE WALL	HALLWAY WALL	RESTROOM	EXTERIOR WALL	BATH/ SHOWER WALL	FLOOR	KITCHEN BACK	
Ye	es	Yes	Yes	Yes	Yes*1	No	No	No	No	

<sup>\*1.</sup> Above waste/water line



\*2. Please note: variations in color, shade, surface texture and size are natural characteristics of all products and should be expected. Images shown are representative. Actual product may vary slightly.





## **FIELD**



ECP-2515NET-GLN1 White



ECP-2515NET-GLN2 Beige



ECP-2515NET-GLN3 Brown



ECP-2515NET-GLN4 Dark Grey

Material:	Porous ceramics/Glazed		
Size/Piece:	150.5 x 24.25mm (5.93 x .96 in)		
Size/Sheet:	302 x 302mm (11.89 x 11.89 in)		
Thickness:	8.5mm		
Joint:	1mm Open joint		
Sq. Ft/Carton:	10.47		
Sheets/Carton:	11		
Mounting:	Back net-Paper		
Weight/Carton:	26.2 lbs		

# TRIM/CORNERS



Installation for corner (External)



Material:	Porous ceramics/Glazed			
Size/Piece:	(35.9+73.75)x24.25mm *(1.41+2.9)x.95 in			
Size/Sheet:	(35.9+73.75)x302mm *(1.41+2.9)x11.89 in			
Thickness:	8.5mm			
Joint:	1mm Open joint			
Ln. Ft/Carton:	3.86			
Sheets/Carton:	4			
Mounting:	Back net-Paper			
Weight/Carton:	5.5 lbs			





# **INSTALLATION**

BASE MA	ΓERIAL SUITED	EXISTING '	WALL FINISHES	OTHER PRECAUTIONS		
Material:	Suitable	Existing Surface	Recommendations	Adhesive/ Thin-set	Mapei Type 1/ Mapei Ultramastic ECO (or comparable products from other brands)	
Gypsum Board	Yes	Wallpaper	Remover wallpaper			
Plymwood	Plymwood Yes		Remove the paint or add a cement layer for stronger bonding	Trowels	3mm (1/6 in) * Wider trowel will lead to excess adhesive on	
Reinforcement of cement board fiber	Yes				the back.	
Concrete + mortar base	Yes	Stone (Marble, Terrazzo, etc.)	Install on top of the existing finish	Grouting	Non-Grouting (1mm Open joint)	
Extrusion cement panel / ALC panel	Yes					

### ■ Apperance of Joints



**Note:** There are spaces between the tiles of ECOCART, which makes the back net and striped arks visible.

https://www.inaxecocarat.com/products/granas-line/






## FOR BETTER FUNCTION

## Sufficient ventilation is required



Proper ventilation is recommended for more effective ECOCARAT performance and to help control humidity.

### Ventilate frequently for 1 to 2 weeks after installation



The moisture of the the adhesive may be present in the room and room temperature may increase.

#### Avoid contact with fabric



The uneven surface of Ecocarat Plus tiles may damage fabric.

### Avoid sharp objects



The tile surface may be scratched or scraped.

#### Do not use hooks, screws or hammers



Doing so can cause cracks and breakage. Please consult contractor.





### DAILY CARE

### Dust regularly with a clean cloth. Avoid washing with water directly.



- Use of mild household detergent will enhance cleaning results
- Remove stains using melamine foam cleaning sponge
- For best results, use melamine foam sponge and mild detergent

Urine Stains

Shoe Prints












Scuff Marks



Nicotine Stains









#### **Cleaning Recommendation**

For best results we suggest the use of a melamine foam sponge for the treatment of dirt and stains shown.

Detergents containing bleach: Read precautions before use.

General household cleaners refer to mild, non-abrasive agents used to clean furniture, wall paper, windows, electronics, etc, and can be used to clean tiles. Do not use thinners or cleansers with acids. Doing so will damage the surface and characteristics of the tile.



### Hard to remove stains must be treated promptly for best results.

Lipstick



Hair Dye Liquid



#### Other: - Paint tool

- -Pen (water based, oil based)
- -Crayon
- -Nail polish

#### Removal of Tough Stains

- Please be careful for dirt and detergent to turn to neither the side nor the back at the time of cleaning. Please use a line stick etc. if needed.
- Remove dirt and spills promptly as set-in stains may be difficult to remove by the methods noted above.
- To remove tough stains, use mild detergent on a toothbrush and gently work into the stain. Stain may be permanent if allowed to absorb over time.
- Regular care and inspection is recommended to maintain the beauty of the tile.

Cleaning tools that can NOT be used





Sand Eraser



**Abrasive Sponge** 



Steel Wool Pad



