



JAPANESE TILE WORLD

HOMURA

Extruded tiles with a sense of craftsmanship, featuring two types of surfaces that convey the taste and warmth of earth.

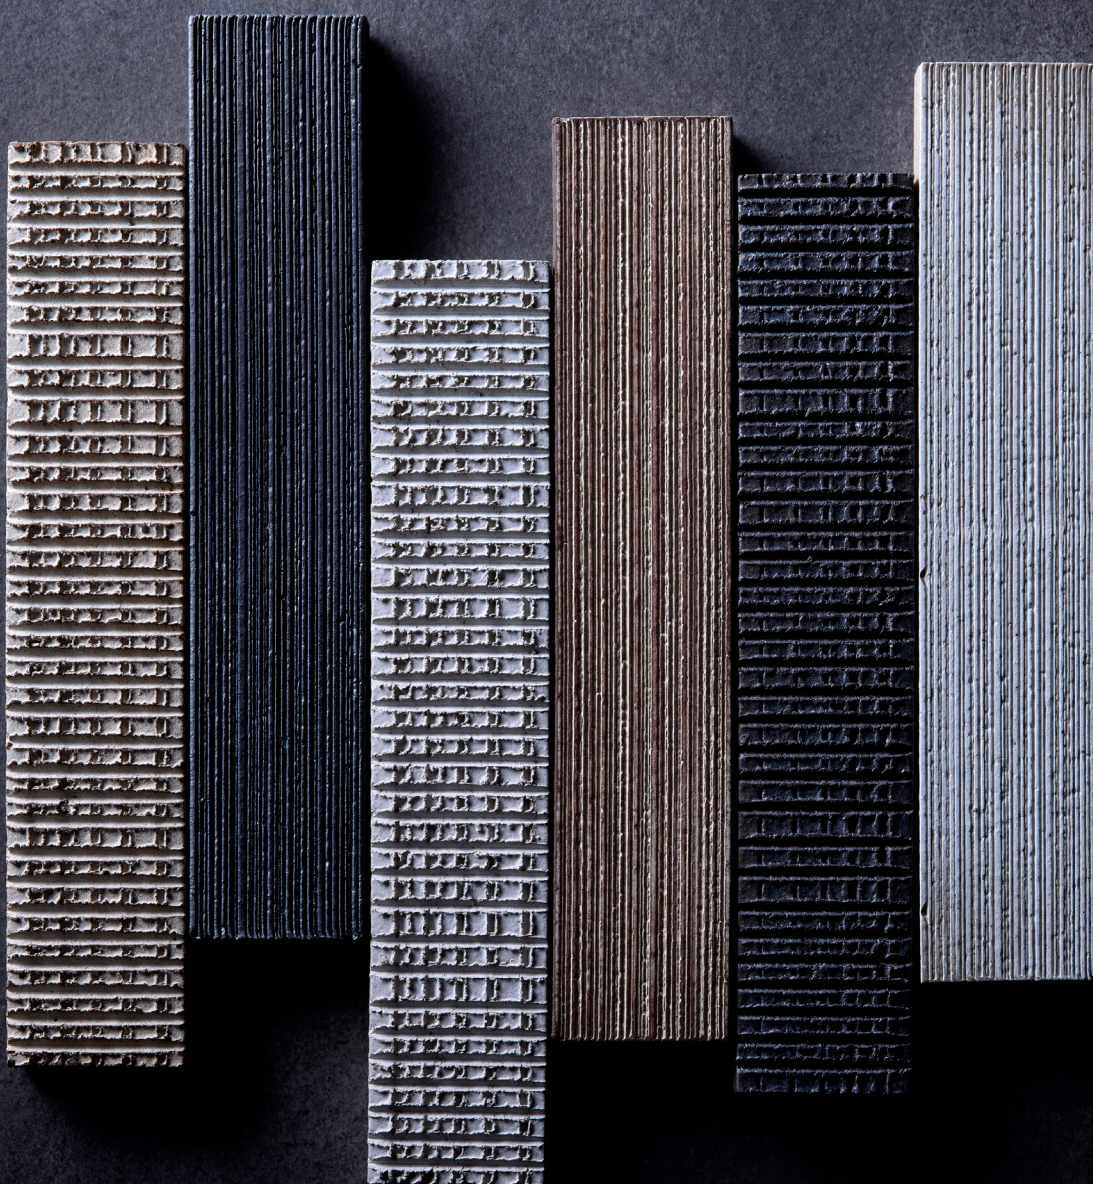

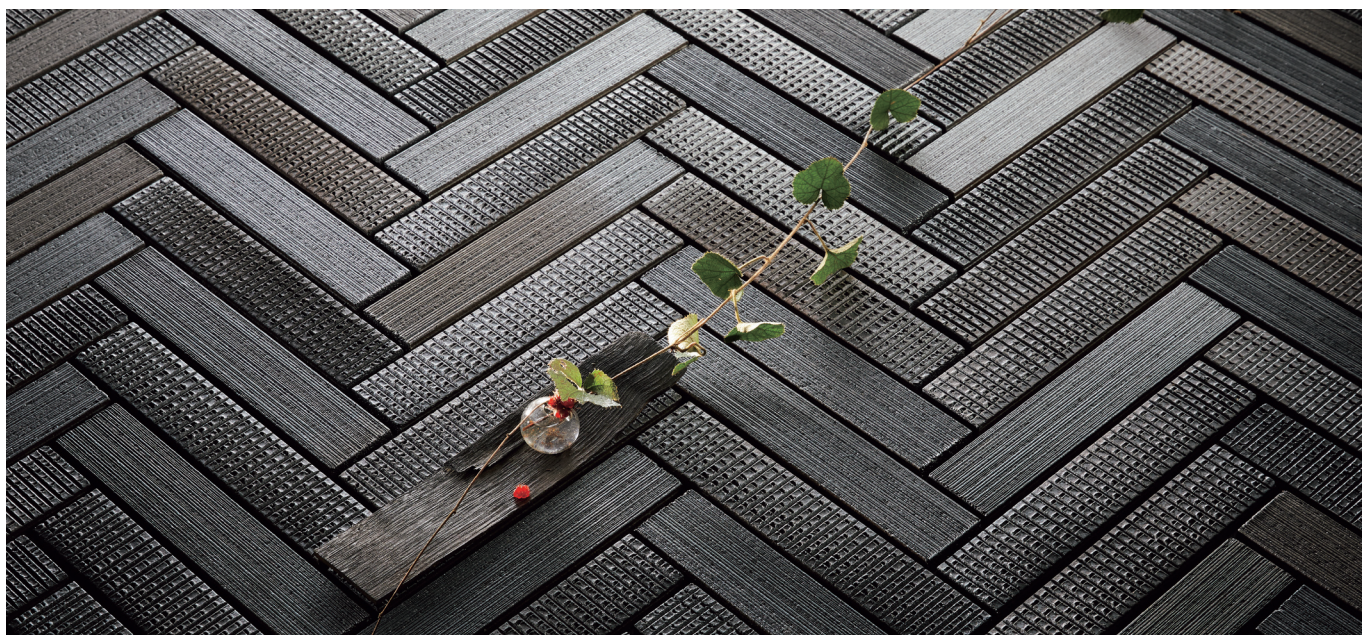

DCF-50B/HOA-3



DCF-50B/HOA-1



DCF-50B/HOA-2

FIELD



HOA-1
Light Beige



HOA-2
Light Brown




HOA-3
Black

Field Tile

DCF-50B/HOA-1~HOA-3

Material	Stoneware/Glazed
Size/pc	235×45 mm / 9.25"×1.77"
Thickness	12 mm
Joint	5 mm
Sqr/Box	1.00 sqm / 10.76 sq.ft.
Qty/Box	84 pcs
Wgt/Box	22 kg / 48.4 lbs




TRIM/CORNERS

90° External Corner

DCF-50B/90-14/HOA-1~HOA-3

Material	Stoneware (Glazed)
Size/pc	(170+50)×45 mm / (6.69+1.97)"×1.77"
Thickness	12 mm
Joint	5 mm
m.ft/Box	1.00 m / 3.28 ft
Qty/Box	20 pcs
Wgt/Box	5 kg / 11.0 lbs



RECOMMENDATIONS

Commercial Wall	Interior Wall	Shower Wall	Exterior Floor	Shower Floor
Yes	Yes	No	No	No

SHADE VARIATIONS

—	—	—	HOA-1, HOA-2, HOA-3

*Please note: variations in color, shade, surface texture and size are natural characteristics of all our products and should be expected. Images shown are representative, but may not indicate all variations in these characteristics.

MAINTENANCE

- First, clean tiles with a damp sponge or soft brush with plain water prior to utilizing
- If dirt persists, wipe the area with mild detergent and water on a sponge or soft brush. Rinse with clean water.
- Do not use acid or alkaline solution to clean tile.
- Do not use steel pads or brushes to clean tile as it may cause surface damage.
- Paint or graffiti can be removed using thinners.
- Consult professional service for more extensive cleaning needs.

For more details,
please visit our website.

