

# 20586

## ALLURE NEW


### 2-HANDLE WALL MOUNT FAUCET, 1.2 GPM (4.5 L/MIN)







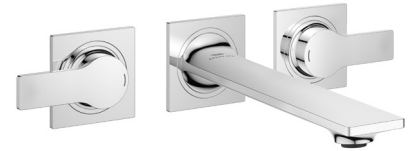


GROHE SPA

#### STANDARD SPECIFICATION:

- GROHE LongLife finish
- GROHE AquaCalibrator
- Wall mount
- 8 1/2" Spout reach
- Precision temperature control with haptic click feedback on handles (optional upon installation, included)
- Requires vessel rough-in valve (33 885 000) (sold separately)
- Requires sink push pop drain with overflow (48 656) or without overflow (48 657) (sold separately)



#### AVAILABLE FINISHES:

- 20586001  Chrome
- 205862431  Matte Black
- 20586A01  Hard Graphite
- 20586AL1  Brushed Hard Graphite
- 20586DL1  Brushed Warm Sunset
- 20586EN1  Brushed Nickel InfinityFinish
- 20586GN1  Brushed Cool Sunrise

#### CERTIFICATIONS:



- ADA
- WaterSense
- CEC Certified
- Low Lead Certified
- CALGreen Compliant
- Massachusetts Plumbing Board Approved
- Energy Policy Act of 1992
- NSF 61
- NSF 372
- CSA B125.1
- ASME A112.18.1
- Complies with lead plumbing laws

#### PRODUCT FEATURES:

NOTE: Install this product according to the installation guide. ADA, CSA compliant when installed to the specific requirements of these regulations.

We reserve the right to make revisions without notice to product specifications. 05-21-2026

**US**  
Tel: 1.630.582.7711 Fax: 1.630.582.7722  
For the most current Specification Sheet,  
go to [www.grohe.us](http://www.grohe.us).

**Canada**  
Tel: 1.888.644.7643 Fax: 1.905.366.2071  
For the most current Specification Sheet,  
go to [www.grohe.ca](http://www.grohe.ca).

PART OF **LIXIL**

20586

# ALLURE NEW

2-HANDLE WALL MOUNT FAUCET,  
1.2 GPM (4.5 L/MIN)



GROHE SPA

## TECHNICAL DATA:

Product Height

Fitting Spout Reach 8-1/2 in

GPM (Min)-GPM (Max) 1.2 GPM

Fitting No of Holes Required 3

