

**CHAMPION® 4 HET RIGHT HEIGHT®  
ELONGATED COMPLETE TOILET**

**2793.128NT**

- Vitreous china
- EverClean® Surface included
- Meets definition for HET (High Efficiency Toilet)
- High efficiency (1.28 gpf/4.8 Lpf)
- Meets EPA WaterSense® Criteria
- Features **Champion® Flushing System**
- 4" non-adjustable piston action Accelerator™ flush valve
- 16-1/2" rim height for accessible applications
- 2-3/8" fully-glazed trapway
- Speed Connect® tank/bowl coupling system
- Chrome finish trip lever is supplied
- Sweeping pier on bowl
- 100% factory flush tested
- 2 bolt caps
- Color-matched plastic EverClean® toilet seat and cover with EverClean surface
- Wax ring gasket with closet bolts
- Lifetime warranty on chinaware, 10 year warranty on all mechanical parts and 1 year warranty on seat
- **Easy Installation.** Everything needed for toilet installation is included and can be hand tightened




**Nominal Dimensions:**

768 x 454 x 792mm  
(30-1/4" x 17-7/8" x 31-3/16")

**Compliance Certifications -**

**Meets or Exceeds the Following Specifications:**

- ASME A112.19.2/CSA B45.1 for Vitreous China Fixtures
- US EPA WaterSense® Specification for HETs

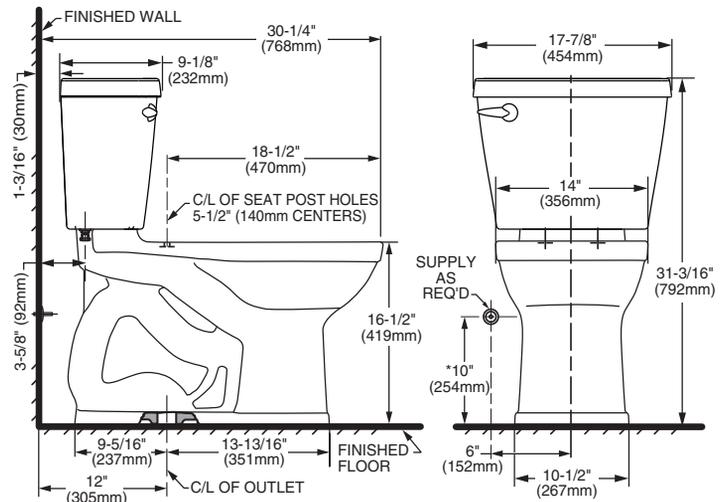

**To Be Specified:**

- Color:  White
- Supply with stop:

**NOTES:**

THIS TOILET IS DESIGNED TO ROUGH-IN AT A MINIMUM DIMENSION OF 305MM (12") FROM FINISHED WALL TO C/L OF OUTLET. SUPPLY NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY. \* DIMENSION SHOWN FOR LOCATION OF SUPPLY IS SUGGESTED.

**IMPORTANT:** Dimensions of fixtures are nominal and may vary within the range of tolerances established by ASME A112.19.2/CSA B45.1. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

**CHAMPION® 4**  
Flushing System

 MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ICC ANSI A117.1 REQUIREMENTS FOR ACCESSIBLE AND USABLE BUILDING FACILITIES-CHECK LOCAL CODES.

