
American Standard

COPELAND[™] IN-WALL DIVERTER VALVES



ALL CONNECTIONS 1/2" NPT

MODEL NUMBER:

TRIM KITS:

T005.430 Diverter Valve Trim Valve Trim ONLY. LESS Valve.

ROUGH VALVE BODIES:

- **R420 Two-Way In-Wall Diverter Valve Rough** 1/2" NPT inlets/outlets. Less Handle.
- □ R430 Three-Way In-Wall Diverter Valve Rough 1/2" NPT inlets/outlets. Less Handle.

NOTE: Cannot be used as a shut-off valve.

71mm (2-3/4") (2-3/4") (2-3/4") (2-3/4") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8") (3-1/8"

GENERAL DESCRIPTION:

In-Wall Diverters: Rotational control alternates water flow between two (R420) or three (R430) different shower outlets (i.e. showerhead, handspray, body side spray or tub spout). Forged brass valve body. Mixed water inlet and two (R420) or three (R430) outlets are marked on back of valve body. 1/2" NPT connections on mixed water inlet and two (R420) or three (R430) outlets. Stamped brass escutcheon. Tub port with increased water flow (see chart).

PRODUCT FEATURES:

Solid Brass Construction: Durable, ideal material for prolonged contact with water.

Removable Plaster Guard: Permits checking of valve installation prior to installing trim parts.

Choice of Finishes: Wide range of durable finishes.

NOTE: Cannot be used as a shut-off valve.

SUGGESTED SPECIFICATION

Two (three) way diverter shall feature a forged brass body with 1/2" NPT mixed water inlet and outlets. Fitting shall be American Standard Model # T005.430.___ (Diverter Valve Trim) and R4_0. (Rough Valve Body).


American Standard

CODES AND STANDARDS

These products meet or exceed the following codes and standards:

ASME A112.18.1

COPELAND[™] IN-WALL DIVERTER CONTROL

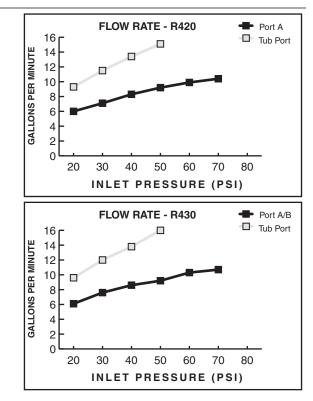

*			Finish Options		
KITS*	Product		Polished Chrome	Oil Rubbed Bronze	PVD Satin Nickel
Σ	Number	Description	002	224	295
TR	T005.430	Diverter Valve Trim. Less valve.			

GH VALVE 30DIES	Product Number	Description
۵ <u>۳</u>	R420	Two-Way In-Wall Diverter. Less Handle.
RO	R430	Three-Way In-Wall Diverter. Less Handle.

** ROUGHS AND TRIMS MUST BE ORDERED SEPARATELY.

E

Meets the American Disabilities Act Guidelines and **ANSI A117.1** Requirements for the physically challenged.