

**Mainstream® Chair Height Elongated  
One-Piece Toilet With Seat**

**753AA101**


- One-piece construction eliminates crevices for easy cleaning
- Low profile fits where space is limited
- Vitreous china made High Efficiency Toilet (HET), ultra-low consumption (1.28 gpf/4.8 Lpf), utilizes 20% less water and meets EPA WaterSense® Criteria
- 3" flush valve with fully-glazed 2" trapway for optimal performance
- 12" rough-in toilet with 16-1/2" rim chair height for accessible applications
- Includes sturdy, slow-close seat that never slams
- Includes polished chrome, side-mounted trip lever, floor bolts, color matched bolt caps and wax ring
- Industry-leading lifetime warranty on chinaware, 2 year warranty on all mechanical parts and 1 year warranty on seat



**Nominal Dimensions:**

29-15/16" x 16-3/8" x 26-3/16"  
(760 x 416 x 665 mm)

Fixture only, supply by others

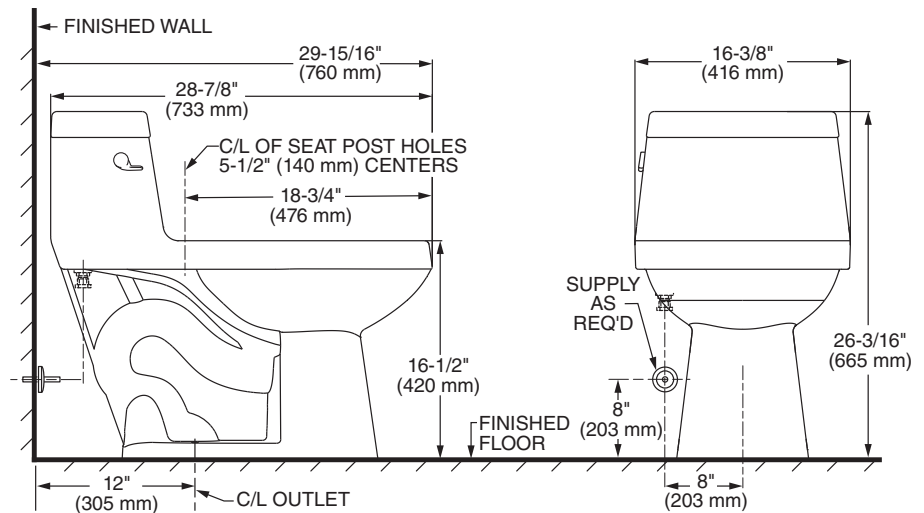

**Compliance Certifications -**

**Meets or Exceeds the Following Specifications:**

- ASME A112.19.2M for Vitreous China Fixtures
- US EPA WaterSense® Specification for HETs

**To Be Specified:**

- ☐ Color:
- ☐ White
- ☐ Supply with Stop:

**NOTES:**

THIS TOILET IS DESIGNED TO ROUGH-IN AT A MINIMUM DIMENSION OF 12" (305mm) FROM FINISHED WALL TO C/L OF OUTLET. SUPPLY NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY.

\* DIMENSION SHOWN FOR LOCATION OF SUPPLY IS SUGGESTED.

**IMPORTANT:** Dimensions of fixtures are nominal and may vary within the range of tolerance established by ANSI Standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.



MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES  
AND ICC ANSI A117.1 REQUIREMENTS FOR ACCESSIBLE AND  
USABLE BUILDING FACILITIES-CHECK LOCAL CODES.



EPA  
WATERSENSE® EFFICIENT  
CERTIFIED



© 2023 AS America Inc.